

PRODUCT CATALOG

**FIRESTOPPING / PERFORMANCE SEALANTS /
FOAM SEALANTS / ELECTRICAL CHEMICALS**

Products designed with performance in mind,
manufactured by passionate individuals to the highest
standards of quality, and backed by unparalleled service
and support. Solutions made for people who want the job
done right this time, next time, every time.

CAULKOLOGIST

Kawk • ol • uh • jist

| noun | A person that has extensive knowledge, experience, or specialization in the chemistry, properties, or application of caulks, sealants, or adhesives.

Ex: Everkem Diversified Products is committed to providing high-performance solutions to Caulkologists.

CONTENTS

WHO WE ARE..... 2

THE ECOSEAL MARK..... 12

FIRESTOP & FIREBLOCK..... 14

HIGH PERFORMANCE SEALANTS..... 24

FOAM SEALANTS..... 38

ELECTRICAL CHEMICALS..... 44

PRIVATE LABEL..... 48

MERCHANDISING..... 58

THE EVERKEM EXPERIENCE..... 60

GENERAL INFORMATION, WARRANTY, AND DISCLAIMER..... 62



WHO WE ARE

We are a team of dedicated individuals who bring positive energy, passion, and pride to what we do. We've got dirt under our fingernails and aren't afraid to roll up our sleeves and get to work – and we don't stop until we finish the job, just like the people who use our products.



OUR MISSION, VISION, AND VALUES


ABOUT US


Founded in 1996 and starting in a small warehouse in Greensboro, North Carolina, Everkem Diversified Products was initially known as Firestopping Products, Inc. As the name suggests, we provided firestopping and fireblocking products, including the first caulkable fireblock sealant for single-family homes.


In 2012, Firestopping Products merged with its marketing arm, Flame Tech Inc, forming Everkem Diversified Products. We chose the Everkem name as a combination of the words Forever Chemistry as a commitment to developing chemistries and products that withstood the test of time.

Today, Everkem offers a full suite of performance-driven product solutions: Firestopping products and accessories, latex sealants, silicones, insulating foam sealants, construction adhesives, state-of-the-art hybrid sealants, and electrical chemicals.

We've built our foundation on innovative manufacturing capabilities, progressive product solutions, and old-fashioned personal service and support. We believe the most effective component to building successful partnerships is the commitment to exceeding the expectations of those we serve.

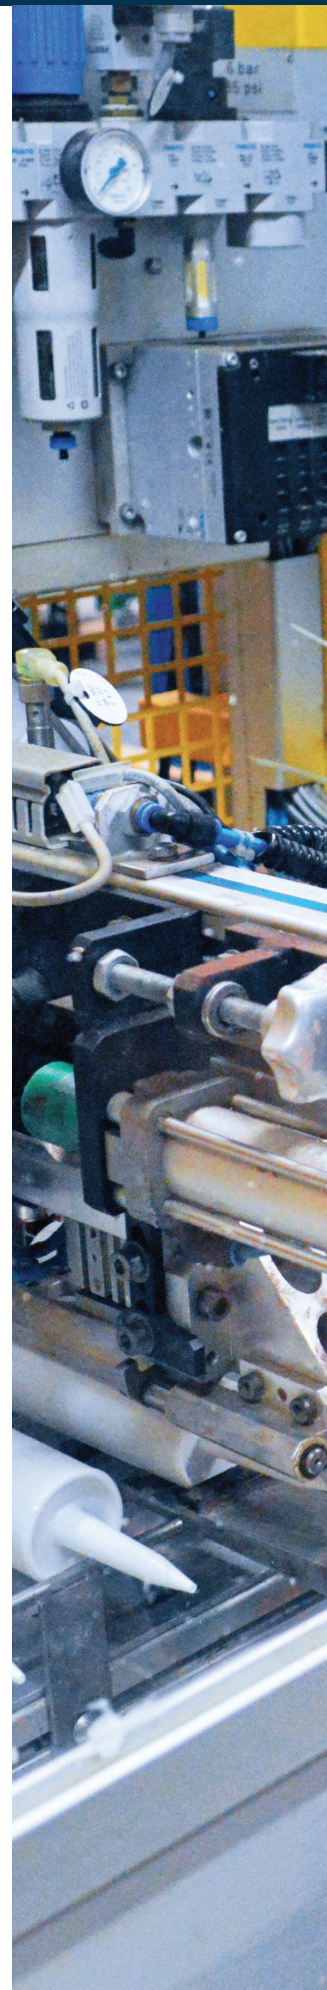

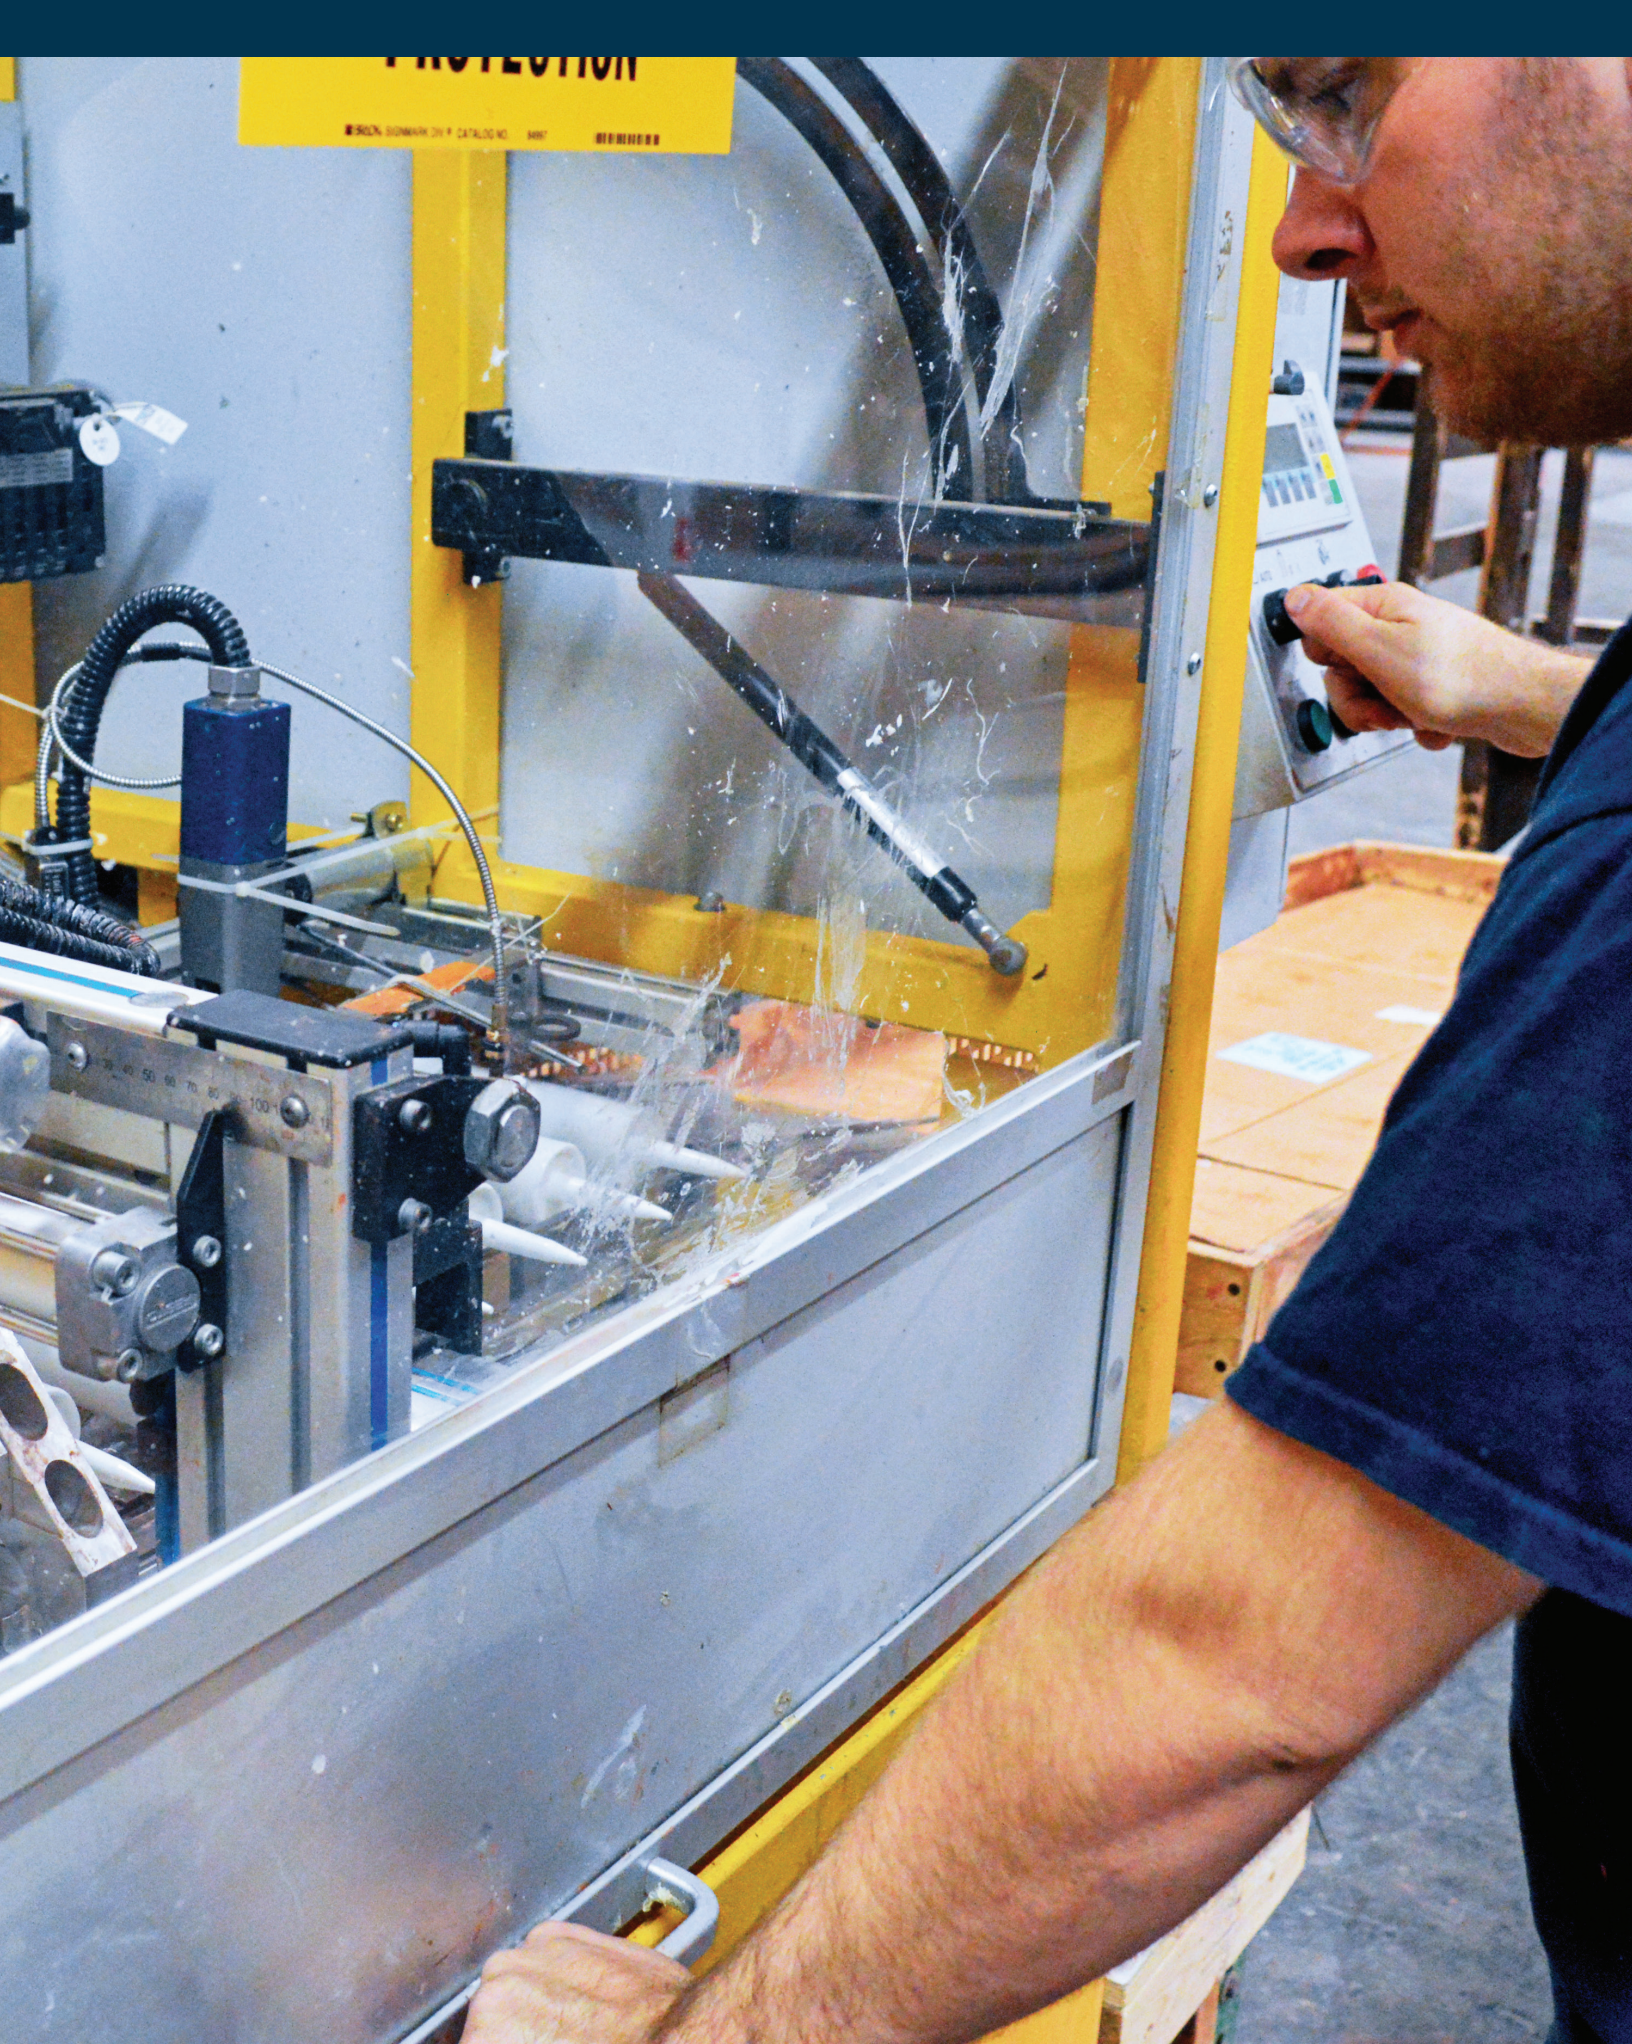

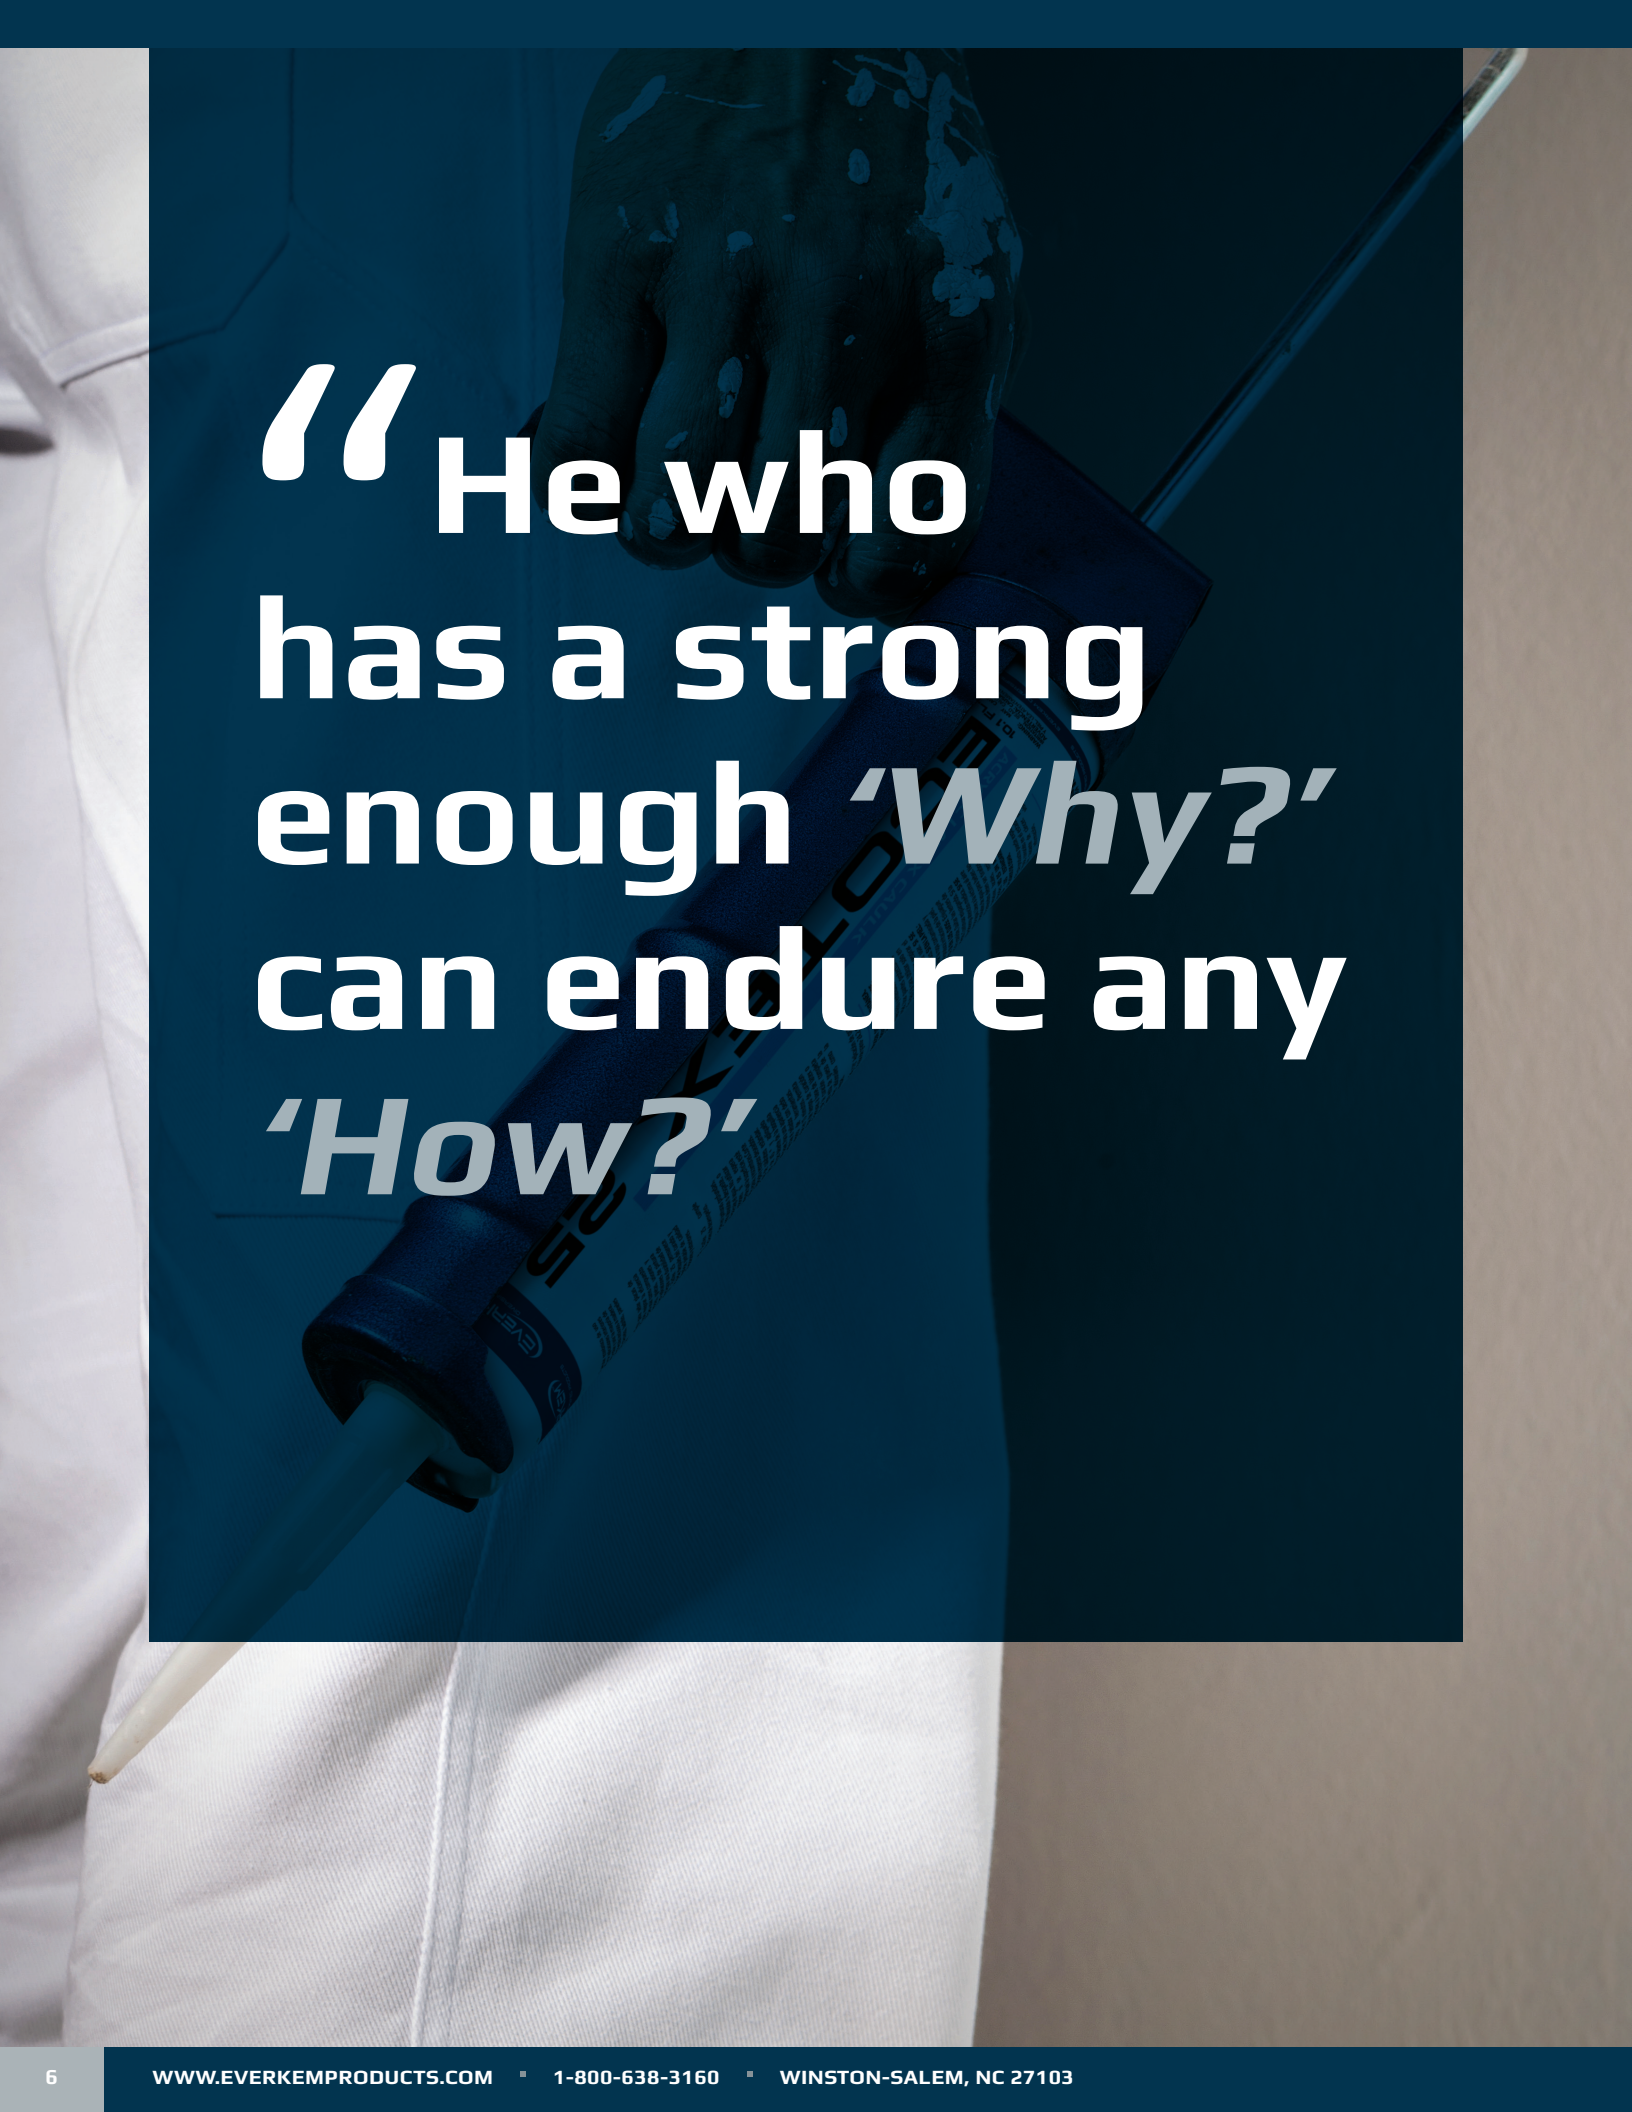A hand holding a blue Everkem marker over a white lab coat. The background is a dark blue gradient. The text is white and bold, with the word 'Why?' in italics.

**“ He who
has a strong
enough *‘Why?’*
can endure any
‘How?’”**

OUR VISION

To be recognized as a standard-setting leader in the construction chemicals industry while remaining true to our mission, values, and commitments. Our products will be known as Top Quality; our customers will view our service as the best in the world; our relationships will be strong and long-lasting partnerships that provide prosperity and success for all.


OUR MISSION

To ensure our customers' and partners' success and the safety and comfort of people and families within the built environment. We accomplish this by manufacturing and selling quality sealants, adhesives, and specialty construction compounds, which we back with authentic, reliable, and personal service.

OUR VALUES

We are committed to challenging ourselves as individuals and as a team to grow every minute of every day to provide a better life for ourselves, our families, our personal and professional network of relationships, and society.

Our 12 Points of Corporate Culture defines the attitudes and behaviors we must instill in ourselves as individuals and as a company to realize our ultimate potential, achieve our vision, and remain true to who we are.

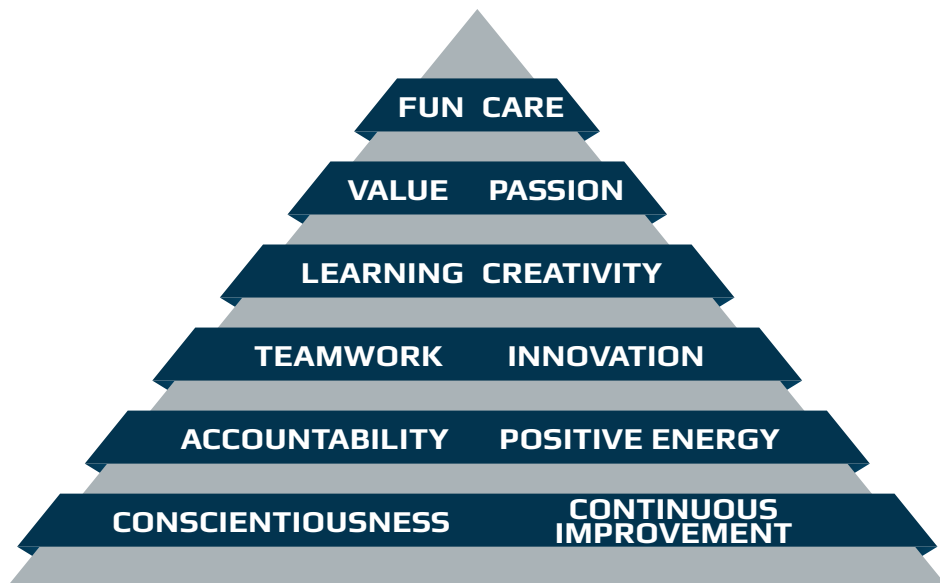



INDUSTRIES WE SERVE

We are proud to provide products, service, and technical expertise that meet various industries' unique and ever-changing demands.

We are committed to working hand-in-hand with customers within each industry landscape to understand their needs and offer the best solutions and expertise to ensure their success.

- Plumbing
 - Electrical
 - HVAC
 - Drywall and insulation
 - Painting
 - Roofing
 - Window and door
 - Glass and glazing
 - Solid surface
 - Siding and gutters
 - Soundproofing
 - Energy savings
 - Solar
 - Wildlife and pest control
 - Refractories
 - Food service
 - Prefabricated structures
 - Manufactured housing
 - Specialty vehicles
 - Marine
 - OEM
 - Maintenance and repair
 - Window and door
 - Siding and gutters
 - Solar
 - Marine
 - OEM
 - DIY
-



REFRACTORIES



ELECTRICAL



HVAC



ROOFING




PLUMBING



SOUNDPROOFING



SIDING & GUTTERS



INSULATION




DRYWALL



ENERGY SAVINGS



FOOD SERVICE



WINDOW & DOOR



ecoseal

LOW VOC CONTENT ECO-FRIENDLY

THE ECOSEAL MARK

As a manufacturer of caulks, sealants, and specialty construction compounds, we recognize the importance of environmental responsibility.

Whether it is sourcing the cleanest and safest raw materials from local suppliers whenever possible, low V.O.C. product formulations, or our innovative manufacturing processes, Everkem is committed to the movement towards sustainability in the built environment.

It was this commitment that led us to create our EcoSeal labeling program. This user-friendly symbol indicates which of our products are “Eco-Safe”, meeting applicable elements of one of the following:

- The U.S. Green Building Council’s (USGBC) LEED Green Building Rating System
- National Association of Homebuilders (NAHB) GREEN Building Standard
- The South Coast Air Quality Management District (AQMD)
- The Bay Area Air Quality Management District (BAQMD)
- Ozone Transport Commission (OTC)
- California Air Resources Board (CARB)



FIRESTOP & FIREBLOCK

Our firestopping and fireblocking products offer an array of solutions for single-family fireblocking as well as multi-family and commercial firestopping applications. Backed by comprehensive UL testing and experienced technical support, our firestopping products are relied on by specifiers, distributors, and contractors.





FIRESTOP WITH CONFIDENCE



FIRESTOPPING



FIRESTOP-814+ INTUMESCENT FIRESTOP SEALANT

Firestop-814+ is a UL Classified, intumescent and elastomeric firestopping caulk designed to resume the integrity of fire-rated assemblies when penetrated by plumbing, electrical, or other mechanical items.




STRONG ADHESION

Firestop-814+ provides a strong, durable bond to most building materials including wood, gypsum, concrete, and more.



ELASTOMERIC

Firestop-814+ remains flexible, making it ideal for use in applications where dynamic movement is expected.



INTUMESCENT

In fire conditions, Firestop-814+ expands to form a char that blocks the passage of flame, smoke, and gases.



PIPE & FITTING COMPATIBLE*

Chemically compatible with FlowGuard Gold®, BlazeMaster®, and Corzan® pipe fittings; PVC, CPVC, ABS, PEX, and other penetrating items.



LOW VOC CONTENT

Tested for emissivity and is LEED compliant as a low emission interior sealant.



SPECIFICATIONS

- UL Classified
- Tested to ASTM-E814
- Tested to ASTM-E1966
- Tested to ASTM-E84
- Tested to ASTM-E90
- Meets LEED v4 emissions requirements
- VOC Content: < 10 g/L

PART #	DESCRIPTION	CASE QTY
FS814+	10.1 OZ. CARTRIDGE - RED	12
FS814+20	20 OZ. SAUSAGE TUBE - RED	16
FS814+28	28 OZ. FIBER CARTRIDGE - RED	12
FS814+5	5 GAL. BUCKET - RED	EACH

FLAMEGUARD-814

NONCOMBUSTIBLE FIRESTOP SEALANT



FIRESTOPPING



Flame Guard-814 is an economical non-combustible, non-intumescent commercial firestopping sealant designed for use in 1 & 2 hour fire-rated concrete floor and wall assemblies.

FEATURES

- Great adhesion
- Smooth consistency
- Identifiable color
- Low VOC

SPECIFICATIONS

- Tested to ASTM-E814
- Tested to ASTM-E1136

PART #	DESCRIPTION	CASE QTY
FG-814	10.1 OZ. CARTRIDGE - RED	12
FG-814-28	28 OZ. FIBER CARTRIDGE - RED	12
FG-814-5	5 GAL. BUCKET - RED	EACH





WRAP STRIPS INTUMESCENT WRAP STRIPS FOR PENETRATIONS



Wrap strips are a flexible, non-curing, highly intumescent material designed for use primarily with plastic and insulated pipe applications. When heated wrap strips expand to form a hard char to prevent the passage of flame, smoke, and hot gases.

FEATURES

- Highly intumescent
- Ready to use
- Easy installation
- Reduces waste

SPECIFICATIONS

- UL Classified
- Tested to ASTM-E814 (UL 1479)
- Tested to ASTM-E1966 (UL 2079)

PART #	DESCRIPTION	CASE QTY
WS-1	1" x144" x ¼" WRAP STRIP	6
WS-2	2" x 144" x ¼" WRAP STRIP	4



FIRESTOP COLLARS INTUMESCENT FIRESTOP COLLARS



Firestop collars are one-part, ready to use firestop devices consisting of a steel collar and intumescent strip. Suitable for up to 4" nominal trade sizes, firestop collars are fastened around plastic pipe and conduit when penetrating fire-rated floors and walls.

FEATURES

- Intumescent
- Ready to use
- Easy installation
- Reduces labor costs

SPECIFICATIONS

- UL Classified
- Tested to ASTM-E814

PART #	DESCRIPTION	CASE QTY
CLR-1	1.5" FIRESTOP COLLAR	12
CLR-2	2" FIRESTOP COLLAR	12
CLR-3	3" FIRESTOP COLLAR	12
CLR-4	4" FIRESTOP COLLAR	12



PUTTY PADS

INTUMESCENT FIRE-RATED PUTTY PADS

Putty pads are non-curing pads designed to seal around electrical boxes to maintain the hourly integrity of fire-rated walls by restricting the passage of flame, smoke, and hot gases.

FEATURES

- Non-curing
- Repositionable
- Easy installation
- Long shelf life
- Identifiable color

SPECIFICATIONS

- UL Classified
- Tested to ASTM-E84
- Tested to ASTM-E90
- Maintains 60 STC rating

PART #	DESCRIPTION	CASE QTY
FT-00732	7" x 7" x 1/8" PUTTY PAD	20



FIRESTOPPING

FIRESTOP PILLOWS

INTUMESCENT FIRESTOP DEVICE

Firestop pillows are one-part, ready to use intumescent materials enclosed in a polyethylene 'pillow'. Firestop pillows are for use in large voids or cavities made for penetrating items such as cable trays, ductwork, and conduits.

FEATURES

- Intumescent
- Ready to use
- Easy installation
- Economical
- Lightweight and self-supporting

SPECIFICATIONS

- UL Classified
- Tested to ASTM-E814 (UL 1479)



PART #	DESCRIPTION	CASE QTY
AD-PLLW	2" x 6" x 9" FIRESTOP PILLOWS	10



FIRESTOP TRAINING AND CERTIFICATION

Thousands of fires occur every year in the United States. These fires cause numerous deaths, thousands of injuries, and billions of dollars in property damage. In 2020, the National Fire Protection Association estimated there were:



If multi-family structures such as apartments, hotels and motels, and college dormitories are considered these totals climb to over 220,000 fires that resulted in over 500 deaths and \$5.4 billion in property loss.

Firestopping plays a vital role in minimizing property damage and loss of life as a result of a fire in multi-family and commercial structures. Firestops work by restoring the fire-resistance of rated assemblies that have been compromised, compartmentalizing the flame and smoke to limit its spread.

But firestops only work if they are installed correctly.



Even the smallest firestopping mistake can lead to a failed inspection. Or, worst of all, a complete firestop system failure that puts property and lives at risk.


With the safety of property and life on the line, installers can't afford to be uninformed when it comes to proper firestopping.



Our free, comprehensive program provides vital information and training in the fundamentals of proper firestopping.

Topics Include:

- ▶ Active & Passive fire protection systems
- ▶ Fire protection codes
- ▶ Firestop testing, standards, and specifications
- ▶ Deciphering firestop system diagrams
- ▶ Proper firestop installation techniques
- ▶ Common firestop code violations
- ▶ Everkem firestopping product knowledge

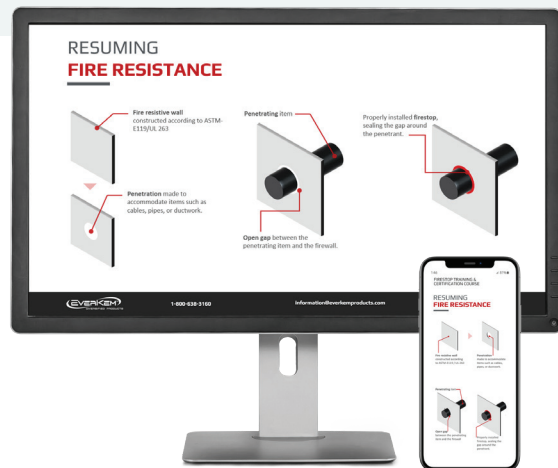

Signing up for this free firestopping course is quick, easy, and gives you lifetime access to all of the course materials.

Learn at your own pace, from any device, any time. The modular structure breaks lessons down into manageable chunks that make finding time to learn easy.

Once you've completed the course, you'll receive a certificate of completion.



**SCAN ME TO
START LEARNING**



FIRE SEAL - 136 RESIDENTIAL FIREBLOCKING CAULK



Fire Seal-136 Fireblocking Caulk meets and exceeds ASTM-E136 and ASTM-E814 standards for fireblocking single-family residential construction. Fire Seal creates an airtight barrier to prevent the passage of flames, smoke, and toxic gases from spreading area to area within concealed spaces.

FEATURES

- Excellent adhesion to most materials
- Will not shrink, crack, or crumble after cure
- Chemically compatible with most pipe fittings and tubing
- Easily identifiable color
- Low VOC

SPECIFICATIONS

- Tested to ASTM-E136
- Tested to ASTM-E814
- Tested to ASTM-E84
- VOC Content: < 1 g/L

PART #	DESCRIPTION	CASE QTY
FS-136	10 OZ. CARTRIDGE - ORANGE	12
FS-136-5	5 GAL. BUCKET - ORANGE	EACH



FIRE CAULK - 136 RESIDENTIAL FIREBLOCKING CAULK



Fire Caulk-136 is a non-combustible caulk for sealing around vents, pipes, ducts, cables, and other penetrants in non-rated, one and two-family residential construction. Fire Caulk 136 forms a non-combustible seal around penetrations to resume the integrity of fireblocks within the concealed stud wall cavities, preventing the passage of flame, smoke, and gases.

FEATURES

- Non-combustible
- Will not shrink, crack, or crumble after cure
- Chemically compatible with most pipe fittings and tubing
- Easily identifiable color
- Low VOC

SPECIFICATIONS

- Tested to ASTM-E136
- VOC Content: < 1 g/L

PART #	DESCRIPTION	CASE QTY
FC-136	10 OZ. CARTRIDGE - ORANGE	12
FS-136-5	5 GAL. BUCKET - ORANGE	EACH





CALL BEFORE YOU INSTALL

Are you having trouble finding the correct system detail for your application? Are you wondering if a firestopping component has been tested in a particular system type or how to install it? Are you just not sure about something?

Don't just give it your best guess. Avoid costly and potentially life-threatening firestopping mistakes and call before you install.

Our experienced team will be happy to recommend the correct product for your application, identify the needed system detail, or help with any other questions you may have.

Remember, if you have any questions at all - **Call Before You Install!**



FIRESTOPPING



**HIGH PERFORMANCE. |
NO COMPROMISES. |**



PERFORMANCE SEALANTS

Our line of high-performance sealants combines innovative chemistries with a commitment to long-term durability. From an economical 25-year acrylic latex to the most state-of-the-art hybrid chemistries, our comprehensive product solutions ensure the best sealant for any application. The result is product performance you can rely on time after time.



ECOTEX 25 ACRYLIC LATEX CAULK



EcoTex 25 is an economical caulking material for multiple interior/exterior applications including the sealing and bonding of joints, and pre-painting applications.

FEATURES

- 25+ year durability
- Permanently flexible
- Paintable
- Low VOC

SPECIFICATIONS

- Meets ASTM-C834
- VOC Content: 11 g/L

PART #	DESCRIPTION	CASE QTY
ET25-10W	10 OZ. CARTRIDGE - WHITE	12
ET25-20W	20 OZ. SAUSAGE TUBE - WHITE	16



ACURA SEAL ACRYLIC URETHANE SEALANT



AcuraSeal is a premium acrylic blend fortified with urethane to offer 50+ years of durability, enhanced adhesion to most building materials, and flexibility in interior and exterior applications.

FEATURES

- 50+ year durability
- Permanently flexible
- Mold and mildew resistant, UV stable
- Paintable
- Low VOC

SPECIFICATIONS

- Meets ASTM-C920
- VOC Content: 16 g/L

PART #	DESCRIPTION	CASE QTY
AS10-W	10 OZ. CARTRIDGE - WHITE	12
AS10-C	10 OZ. SAUSAGE TUBE - CLEAR	12





SILTEX 40

SILICONIZED ACRYLIC LATEX CAULK

SilTex 40 offers forty-plus years of durable adhesion to most building materials. Able to be used in both interior and exterior applications, SilTex 40 forms a paintable, durable, mold and mildew-resistant protective seal.



40+ YEAR DURABILITY

SilTex 40 offers 40+ years of durable, water resistant adhesion.



STRONG & FLEXIBLE ADHESION

SilTex 40 bonds to most building materials and remains flexible after cure.



INTERIOR & EXTERIOR USE

Use SilTex 40 inside for kitchens and baths, or outside on trim and siding.



PAINTABLE

Paintable with latex-based paints after 2 hours, with oil-based paints after 24+ hours.



MOLD AND MILDEW RESISTANT

SilTex 40's mold and mildew resistance helps protect structures and occupants' health.



LOW VOC CONTENT

Tested for emissivity and is LEED compliant as a low emission interior sealant.

SPECIFICATIONS

- Meets ASTM-C834
- Meets LEED v4 emissions requirements
- Tested to ASTM-G21
- VOC Content: 16 g/L

PART #	DESCRIPTION	CASE QTY
ST40-10W	10 OZ. CARTRIDGE - WHITE	12
ST40-10C	10 OZ. CARTRIDGE - CLEAR	12
ST40-5W	5.5 OZ. SQUEEZE TUBE - WHITE	12
ST40-5C	5.5 OZ. SQUEEZE TUBE - WHITE	12



SOUND SEAL 90

DRAFT, SMOKE & ACOUSTICAL SEALANT

Sound Seal 90 seals out draft, smoke, and unwanted sound transmission to achieve or maintain desired STC values in assemblies where sound-rating is required. Sound Seal 90 offers strong, permanently flexible adhesion to most common building materials, including wood, drywall, and concrete.



REDUCES SOUND

Tested to ASTM-E90, Sound Seal 90 reduces sound transmission to achieve or maintained desired STC values in sound-rated assemblies.



BLOCKS SMOKE & DRAFT

Sound Seal 90's durable bond seals against smoke and drafts.



GUN & SPRAY GRADE FORMULAS

Gun and spray grades allow for flexibility and cost savings in application.



STRONG & FLEXIBLE ADHESION

Sound Seal 90 offers a strong, permanently flexible adhesion to most building materials.



MOLD & MILDEW RESISTANT

Sound Seal 90 resists mold and mildew, helping to protect structures and improve indoor air quality.



LOW VOC CONTENT

Tested for emissivity and is LEED compliant as a low emission interior sealant.

SPECIFICATIONS


- Tested to ASTM-E90
- Tested to ASTM-C834
- Tested to ASTM-C919
- **Not for use** in fire-rated assemblies
- Tested to ASTM-E84
- Tested to ASTM-G21
- Meets LEED v4 emissions requirements
- VOC Content: 23 g/L



WITHOUT SOUND SEAL 90

Sound waves travel through the air and go over, under, or around barriers or obstacles. Some common flanking paths that sound may take are through framing connections (A), the joints of ceilings and walls (B), the joints of walls and floors (C).

Any area of a room that is improperly sealed will allow sound transmission and compromise the STC rating of a wall assembly, even if the assembly is built properly.

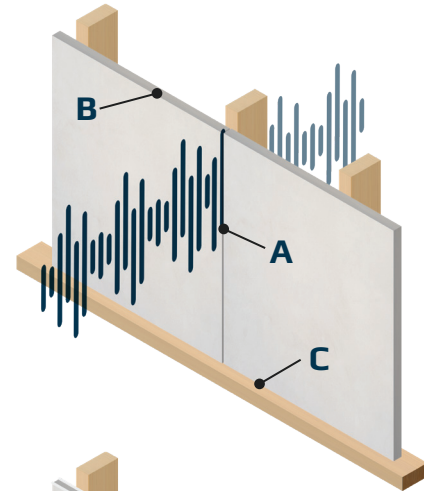


WITH SOUND SEAL 90

Sound Seal 90's durable, flexible bond seals off the flanking paths sound waves use to travel from one area to another, ensuring the desired STC rating is maintained.

Use Sound Seal 90 in the following applications to prevent unwanted sound transmission:

- Top and bottom runners prior to drywall installation
- Outer edge perimeter joints of drywall
- Bottom-of-wall, wall-to-wall, and head-of-wall joints in smoke partitions.
- Cutouts and utility penetrations in non-fire rated smoke partitions and acoustical assemblies.

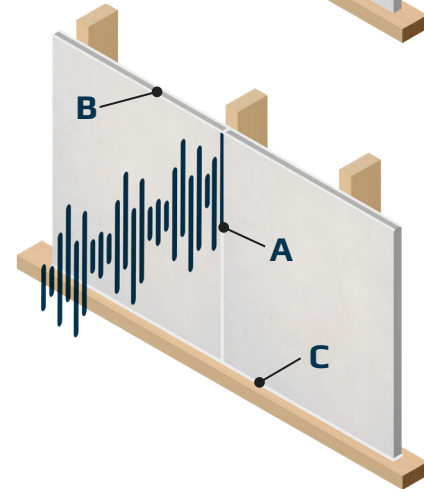

Sound Seal 90 is available in an easy-to-apply sprayable formulation.

The quick application reduces labor and material waste, especially on long joints or seams.



PART #	DESCRIPTION	CASE QTY
SS90-20	20 OZ. SAUSAGE TUBE - GUN GRADE - WHITE	16
SS90-28	28 OZ. FIBER TUBE - GUN GRADE - WHITE	12
SS90-5	5 GAL. BUCKET - GUN GRADE - WHITE	EACH
SS90-5SG	5 GAL. BUCKET - SPRAY GRADE - WHITE	EACH



ALL GRIP 60 ALL-PURPOSE CONSTRUCTION ADHESIVE



All Grip 60 is an acrylic-based multi-purpose construction adhesive formulated for heavy-duty interior and exterior construction, remodeling, and repair projects. All Grip 60 offers outstanding adhesion and creates a strong, lasting bond on a wide range of common building materials.

FEATURES

- Interior and exterior use
- Paintable
- Quick-grab chemistry
- Long-lasting, high-strength bond
- Easy cleanup
- Low VOC

SPECIFICATIONS

- Tested to ASTM-C557
- VOC Content: 54 g/L

PART #	DESCRIPTION	CASE QTY
AG60-10	10 OZ. CARTRIDGE - TAN	12
AG60-20	20 OZ. SAUSAGE TUBE - TAN	16



GYP GRIP 40 HEAVY DUTY DRYWALL ADHESIVE



Gyp Grip 40 is a premium heavy-duty construction adhesive formulated to adhere drywall to wood and steel studs, gypsum board to gypsum board, and bonding other building material substrates. Gyp Grip 40 offers a fast grab for quick drywall installation and high-powered adhesion that reduces the use of mechanical fasteners by up to 50%.

FEATURES

- Reduces fastener usage by up to 50%
- Reduces nail pops
- Dampens sound
- Low VOC

SPECIFICATIONS

- Tested to ASTM-C557
- VOC Content: 32 g/L

PART #	DESCRIPTION	CASE QTY
GG40-28	28 OZ. FIBER CARTRIDGE - TAN	12



RELIABLE

Ri • lī • ə • bəl

| adjective | Consistently good in quality or performance; able to be trusted. That which may be trusted; dependable in achievement, accuracy, honesty.

Ex: The reliability of the people who provide you with products, are just as important as the products themselves.



TRUSIL 100

100% SILICONE SEALANT

TruSil 100 Silicone Sealant is a high-performance, 100% silicone sealant/adhesive. TruSil 100 demonstrates high strength adhesion to most non-porous building materials and excellent weather resistance under the most severe conditions.



100% SILICONE

TruSil 100 is 100% silicone, providing superior performance compared to lesser 'extended' silicone formulations.



50+ YEAR DURABILITY

TruSil 100 offers 50+ years of weather-resistant durability even under the harshest conditions.



HIGH & LOW TEMP PERFORMANCE

TruSil 100 resists temperatures up to 450°F, yet remains flexible in temperatures as low as -55°F.



STRONG & FLEXIBLE ADHESION

With +/- 25% joint movement capability, TruSil 100 offers a lasting bond that's as flexible as it is strong.



LOW VOC CONTENT

Tested for emissivity and is LEED compliant as a low emission interior sealant.



MOLD & MILDEW RESISTANT

TruSil 100 resists mold and mildew to protect air quality, health, and safety.



NSF-51 CERTIFIED

TruSil 100 is NSF 51 certified, making it ideal caulk to use in and around food processing and storage. Use TruSil 100 to safely seal kitchen and restaurant appliances, sinks, refrigeration units, or any application that may come into contact with food.

SPECIFICATIONS

- 100% silicone
- Service temperature -55°F to 400°F continuous / 450°F intermittent
- NSF-51 certified
- Meets ASTM-C920
- Meets FDA Regulation No. 21 CFR 177
- Meets federal specifications: TT-S-00230C, TT-S-01453A
- Meets LEED v4 emissions requirements
- VOC Content: 30 g/L

NEED HIGHER TEMPERATURE PERFORMANCE?



PERFORMANCE SEALANTS

TRUSIL HTS HIGH TEMPERATURE SILICONE SEALANT

TruSil HTS is used in applications that require high temperature performance. TruSil HTS adheres to most common building materials and provides a durable seal that can withstand continuous exposure to temperatures as high as 500°F, with intermittent exposure up to 600°F.

FEATURES

- High temperature performance (500°F continuous / 600°F intermittent)
- Low temp flexibility (as low as -55°F)
- 50+ year durability
- Mold and mildew resistant
- +/- 25% joint movement
- Low VOC

SPECIFICATIONS

- Service temperature -55°F to 500°F continuous / 600°F intermittent
- NSF-51 certified
- Meets ASTM-C920
- Meets FDA Regulation No. 21 CFR 177
- Meets federal specifications: TT-S-00230C, TT-S-01453A
- VOC Content: 30 g/L



NSF-51 CERTIFIED

TruSil HTS is NSF 51 certified, meaning it is safe to use in high temperature applications that may come into contact with food such as the manufacture and repair of smokers and grills, encapsulating heating elements, and sealing high temperature ductwork like range vents and exhaust hoods.

PART #	DESCRIPTION	CASE QTY
TS-100C	TRUSIL 100 - 10.1 OZ. CARTRIDGE - CLEAR	12
TS-100W	TRUSIL 100 - 10.1 OZ. CARTRIDGE - WHITE	12
TS-100B	TRUSIL 100 - 10.1 OZ. CARTRIDGE - BLACK	12
TS-100A	TRUSIL 100 - 10.1 OZ CARTRIDGE - ALUMINUM	12
TS-100MRTW	TRUSIL 100 - 10.1 OZ CARTRIDGE - MILDEW RESISTANT TRANSLUCENT WHITE	12
TS-100-20C	TRUSIL 100 - 20 OZ. SAUSAGE TUBE - CLEAR	16
HTS-100	TRUSIL HTS - 10.1 OZ. CARTRIDGE - HIGH TEMP RED	12



EVOSEAL MS HYBRID POLYMER SEALANT



EvoSeal MS is a hybrid polymer sealant designed to resist severe environmental conditions encountered in roofing, siding, and other industries. EvoSeal MS adheres to many substrates including EPDM rubber roofing, Kynar coated materials, aluminum, PVC, vinyl, steel, glass, marble, concrete and masonry, wood, and many plastics.

FEATURES

- Applies in temperatures as low as 30°F
- Can be applied to wet surfaces
- UV stable
- Fast cure
- Paintable
- Low VOC and solvent-free

SPECIFICATIONS

- Meets ASTM-C920
- Meets ASTM-G155/151 for UV exposure
- Tested to AAMA 802.3 (Type II), 803.3 (Type I), 808.3, 805.2 (Group C)
- Meets federal specifications TT-S-00230C
- Meets FDA/USDA requirements
- VOC Content: 19 g/L

PART #	DESCRIPTION	CASE QTY
ES10W	10 OZ. CARTRIDGE - WHITE	12
ES10G	10 OZ. CARTRIDGE - GRAY	12
ES10B	10 OZ. CARTRIDGE - BLACK	12
ES10DB	10 OZ. CARTRIDGE - DARK BRONZE	12



RUBBER GUARD NS⁵ NON-SKINNING BUTYL RUBBER SEALANT



Rubber Guard-NS is a non-skinning, non-curing, butyl based sealant. Rubber Guard-NS is non-staining, paintable, and delivers excellent adhesion to many substrates while exhibiting exceptional durability.

FEATURES

- Durable, long-lasting waterproof bond
- Permanently flexible
- Adheres to most building materials
- Can be used as an acoustical sealant in STC-rated assemblies
- Low VOC

SPECIFICATIONS

- Meets ASTM-C919
- VOC Content: <150 g/L

PART #	DESCRIPTION	CASE QTY
RGNS-10G	10 OZ. CARTRIDGE - GRAY	12



FIRE PATCH FURNACE & RETORT CEMENT



PERFORMANCE SEALANTS



Fire Patch is a one-part, medium-duty, refractory cement able to withstand temperatures exceeding 2700°F. Fire Patch is used to seal and repair openings, cracks, joints, and seams encountered in furnaces, fireboxes, chimneys, stoves, and other refractory applications.

FEATURES

- Withstands temperatures over 2700°F
- Pre-mixed and ready to use
- Smooth consistency
- Low VOC

SPECIFICATIONS

- Tested to ASTM-C557
- VOC Content: < 1 g/L

PART #	DESCRIPTION	CASE QTY
FP-10	10.1 OZ. CARTRIDGE - GRAY	12
FP-32	32 OZ. PAIL - GRAY	12
FP-64	½ GAL. PAIL - GRAY	4
FP-128	1 GAL. BUCKET - GRAY	2
FP-25	2 GAL. BUCKET - GRAY	EACH

* Contact us for additional packaging options not listed in table.





PRO SERIES CG-00142 10 OZ. HEAVY DUTY ROTATING BARREL CAULK GUN



Designed for the professional applicator, the Pro Series CG-00142 is perfect for heavier bodied sealants and adhesives and lower viscosity caulking products like acrylic and silicone.

FEATURES

- Rotating barrel
- No-drip design
- Thumb trigger pressure release

SPECIFICATIONS

- Fits standard 10 oz. cartridges
- 15:1 thrust ratio
- Solid steel construction

PART #	DESCRIPTION	CASE QTY
CG-00142	PRO SERIES 10 OZ. ROTATING BARREL CAULK GUN	12

PRO SERIES CG-00141 10 OZ. SKELETON CAULK GUN



FEATURES

- Rotating barrel
- No-drip design
- Thumb trigger pressure release

SPECIFICATIONS

- Fits standard 10 oz. cartridges
- 12:1 thrust ratio
- Solid steel construction

PART #	DESCRIPTION	CASE QTY
C6-00141	PRO SERIES 10 OZ. SKELETON CAULK GUN	12

PRO SERIES CG-00140 10 OZ. CRADLE CAULK GUN



FEATURES

- Economical
- Ladder hook
- Nozzle cutter

SPECIFICATIONS

- Fits standard 10 oz. cartridges
- 6:1 thrust ratio
- Solid steel construction

PART #	DESCRIPTION	CASE QTY
C6-00140	PRO SERIES 10 OZ. CRADLE CAULK GUN	12

PRO SERIES CG-00143 29 OZ. HEAVY DUTY CAULK GUN


A durable solution for large caulking projects, the CG-00143 Heavy Duty 29 oz. caulking gun is perfect for gunning acrylic latex, silicone sealants, and construction adhesives.

FEATURES

- Rotating barrel
- Thumb trigger pressure release
- No drip design

SPECIFICATIONS

- Fits standard quart-sized cartridges
- 10:1 thrust ratio
- Solid steel construction

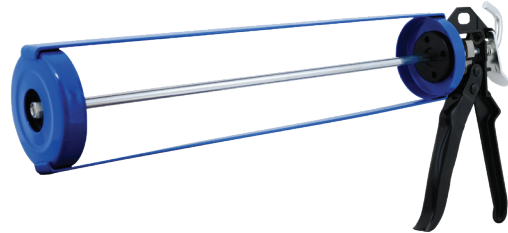

PART #	DESCRIPTION	CASE QTY
CG-00143	PRO SERIES HEAVY DUTY QUART CAULK GUN	12



PRO SERIES CG-00144 SAUSAGE TUBE GUN


The Pro Series Sausage Tube gun is designed with an 18:1 thrust ratio for the application of seam sealers, sealants, and adhesives packaged in sausage tubes.

FEATURES

- Easy front load with quick screw system
- Thumb trigger pressure release
- Multiple nozzles of varying bead sizes

SPECIFICATIONS

- Fits standard 20 oz. sausage tube packaging
- 18:1 thrust ratio
- Aluminum construction

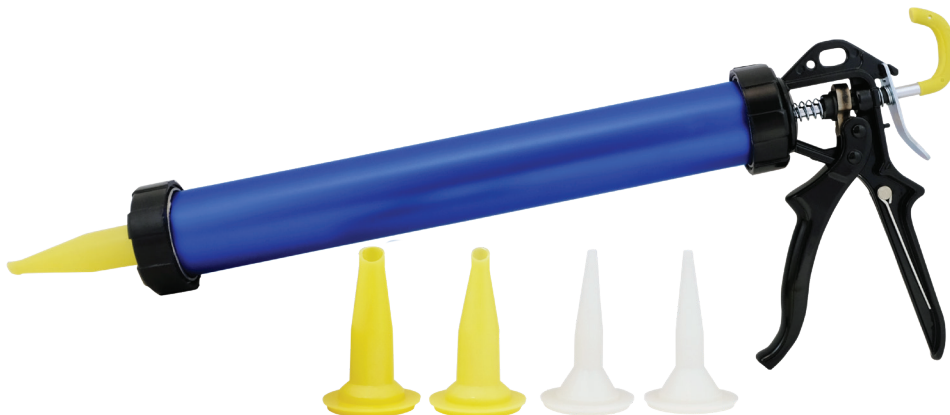

PART #	DESCRIPTION	CASE QTY
CG-00144	PRO SERIES HEAVY DUTY 20 OZ. SAUSAGE TUBE GUN	EACH



FOAM SEALANTS

With the ever-increasing importance of energy efficiency, Everkem Diversified Products offers a variety of insulating foam sealants and accessories to complement our High-Performance Sealants. Our foam products provide consistent quality, high yield, and economical solutions for the most demanding insulating applications.





**MAXIMUM RESULTS.
MINIMUM EFFORT.**



FULL-FILL GP GENERAL PURPOSE GAPS & CRACKS FOAM SEALANT



Full-Fill GP is a straw-dispensed, single-component, expanding polyurethane foam. Full-Fill GP seals gaps, cracks, voids, and crevices in interior and exterior applications. Full-Fill GP forms an airtight, weather-resistant barrier that keeps out unwanted moisture, air infiltration, and pests.

FEATURES

- Economically fills, seals, and insulates
- Interior and exterior use
- Improves energy efficiency
- High yield formulation
- Easy to use
- Reduces labor costs

SPECIFICATIONS

- Tested to ASTM-E84
- VOC Content: 165 g/L

PART #	DESCRIPTION	CASE QTY
TY0013	12 OZ. STRAW DISPENSED CAN - TAN	12



FLAMETECH FB FIREBLOCKING FOAM SEALANT



Flametech FB is a ready-to-use polyurethane foam sealant for filling, insulating, and sealing the annular space around wires, vents, pipes, and other mechanical items that penetrate top/sill plates in Type V one and two-family residential construction.

FEATURES

- Tack free in 10 minutes, cuttable in 1 hour
- Water-resistant
- Easy to use
- Reduces labor costs
- Identifiable orange color

SPECIFICATIONS

- UL recognized alternative fireblocking material
- For use in Type V construction
- **Not for use** in fire-rated assemblies
- Tested to ASTM-E84
- VOC Content: 106 g/L

PART #	DESCRIPTION	CASE QTY
DP44242	12 OZ. STRAW DISPENSED CAN - ORANGE	12



FULL-FILL PRO WINDOW & DOOR INSULATING FOAM SEALANT

Full-Fill Pro Window & Door Insulating Foam Sealant is a single-component, low-pressure expanding polyurethane foam sealant. Full-Fill Pro's weather resistant seal improves energy efficiency by preventing air exchange at windows, doors, and sill plates. Full-Fill Pro adheres to most construction materials and will not bow or distort window and door frames when installed correctly.

FEATURES

- Improves energy efficiency
- Will not damage window or door frames
- Mold and mildew resistant
- Easy to use
- Reduces labor costs

SPECIFICATIONS

- Tested to ASTM-E84
- Complies with AAMA 812
- VOC Content: 165 g/L

PART #	DESCRIPTION	CASE QTY
TY0793	24 OZ. GUN DISPENSED CAN - TAN	12



FOAM SEALANTS

THERMAL SEAL ALL-IN-ONE FIREBLOCK+WINDOW & DOOR FOAM SEALANT

Thermal Seal is a single-component expanding polyurethane foam sealant that offers long lasting thermal and moisture protection for use in window and door as well as fireblocking applications.

Window & Door Foam: Thermal Seal is a low-pressure expanding foam that complies with AAMA 812 and will not bow or distort window or door frames.

Fireblock Foam: Thermal Seal fills the annular space around wires, vents, and other mechanical items that penetrate sill/top plate in Type V, non-rated, one and two-family residential construction.

FEATURES

- Improves energy efficiency
- Interior and exterior use
- Will not damage window or door frames
- Tack-free in 10 minutes, cuttable in 1 hour
- Easy to use
- Identifiable orange color

SPECIFICATIONS

- UL recognized alternative fireblocking material
- For use in Type V construction
- **Not for use** in fire-rated assemblies
- Tested to ASTM-E84
- Complies AAMA 812
- VOC Content: 165 g/L

PART #	DESCRIPTION	CASE QTY
TS-GF24	24 OZ. GUN DISPENSED CAN - ORANGE	12





GC-12 MULTI-PURPOSE POLYURETHANE FOAM & GUN CLEANER



GC-12 cleans, protects, and extends the working life of foam guns, can valves, and dispensing equipment. GC-12 also cleans and dissolves uncured polyurethane foams and adhesives. GC-12 may also be used to prepare surfaces to enhance adhesion.

FEATURES

- Multi-functional for both manual and gun application
- Prevents sealing of can and gun valves between use
- Environmentally friendly formula

SPECIFICATIONS

- No CFCs
- VOC Content: N/A - Product contains a VOC exempt solvent

PART #	DESCRIPTION	CASE QTY
CG-12	17 OZ. (207 mL) AEROSOL DISPENSED CAN	12



PRO SERIES FG-00145 FOAM DISPENSING GUN



The Pro Series foam gun is durable, yet lightweight. The ergonomic comfort-grip handle reduces hand fatigue for longer applications. The adjustable flow control helps reduce waste by allowing you to dial in the correct bead size for any application.

FEATURES

- Improves foam yield and expansion
- Adjustable flow control
- Self-cleaning needle
- Comfort grip handle
- Multiple tips included

SPECIFICATIONS

- 7 in. barrel length
- 13 in. total length
- 1.25 lbs. net weight
- Individually tested

PART #	DESCRIPTION	CASE QTY
FG-00145	PRO SERIES FOAM DISPENSING GUN	EACH

CCFGE ALL METAL FOAM DISPENSING GUN

The CCFGE foam gun features a durable, all metal body. Through the use of the control dial, product flow can be adjusted to reduce waste. The gun is hermetically sealed, which prevents hardening of the product in the gun.



FEATURES

- Adjustable flow control
- Self-cleaning needle
- Comfort grip handle
- Improves foam yield and expansion

SPECIFICATIONS

- Nickel plated brass body
- Brass universal basket
- 6 in. barrel length
- 11 in. total length
- 1.12 lbs. net weight
- Made under ISO 9001

PART #	DESCRIPTION	CASE QTY
CCFGE	ALL METAL FOAM DISPENSING GUN	EACH



FOAM SEALANTS

CCFGB LONG BARREL FOAM DISPENSING GUN



The CCFGB long barrel foam gun's extra-long barrel makes applying foam sealants in hard to reach areas easy. The adjustable flow control allows for adjustment of bead size on the fly. CCFGB's body and basket is Teflon™ coated for effortless cleanup.


FEATURES

- Long barrel for hard to reach applications
- Teflon coating for easy cleaning
- Adjustable flow control
- Additional tips included

SPECIFICATIONS

- Teflon coated brass body and universal basket
- 31 in. barrel length
- 36 in. total length
- 2.375 lbs. net weight
- Individually tested
- Made under ISO 9001

PART #	DESCRIPTION	CASE QTY
CCFGB	LONG BARREL FOAM DISPENSING GUN	EACH

A close-up photograph of a worker in a high-visibility yellow vest and brown work boots. The worker is positioned in front of industrial machinery, with a large metal pipe and various fittings visible. The scene is set in a factory or industrial environment, with a concrete floor and structural beams in the background. The lighting is bright, highlighting the textures of the clothing and the metallic surfaces.

HIGH-POWERED APPLICATIONS? HIGH-POWERED PRODUCTS.



ELECTRICAL CHEMICALS

Most likely, many have never heard the term 'electrical chemicals'. We don't mind being the first company to coin the phrase. In the electrical industry, oxide inhibiting compounds and wire-pulling lubricants are essential components for the professional contractor.



EZ-PULL WIRE PULLING LUBRICANT



EZ-Pull is a clear lubricating gel that reduces friction and limits surface tension to make even the most challenging wire pulls quick and easy. Non-corrosive and non-toxic, EZ-Pull is compatible with all cable jacket types.

FEATURES

- Superior lubricity for quick and easy pulling
- Neutral PH
- Safe for all cable types
- Will not clog or corrode conduits
- Low VOC

SPECIFICATIONS

- UL Listed
- Tested to ASTM-D1693
- Stable from 30°F to 120°F

PART #	DESCRIPTION	CASE QTY
EZ-PULL-32	32 OZ. BOTTLE	12
EZ-PULL-1	1 GAL. PAIL	4
EZ-PULL-5	5 GAL. BUCKET	EACH
EZ-PULL-55	55 GAL. DRUM	EACH



ANTI-OX

ANTI-OXIDIZING COMPOUND

Anti-Ox is a non-dripping, paste-like grease designed to prevent corrosion and oxide film formation in copper-to-aluminum and aluminum-to-aluminum electrical connections. Anti-Ox helps to produce a cooler connection, improves conductivity, and extends the overall service life of the electrical connection.

FEATURES

- Can be used as an anti-seizing compound
- Compatible with insulating materials
- Improves conductivity
- Produces cooler connections

SPECIFICATIONS

- Tested to UL 486A-486B
- For use in applications up to 600 volts
- Stable over -40°F to 300°F (-40°C to 148.9°C)
- Non-melting at 500°F (260°C)

PART #	DESCRIPTION	CASE QTY
AO-4	4 OZ. BOTTLE	12
AO-8	8 OZ. BOTTLE	12
AO-1G	1 GAL. PAIL	4
AO-5G	5 GAL. BUCKET	EACH
AO-55G	55 GAL. DRUM	EACH




ELECTRICAL CHEMICALS



Anti-Ox Helps Produce Cooler Connections

CYCLES 700 to 702

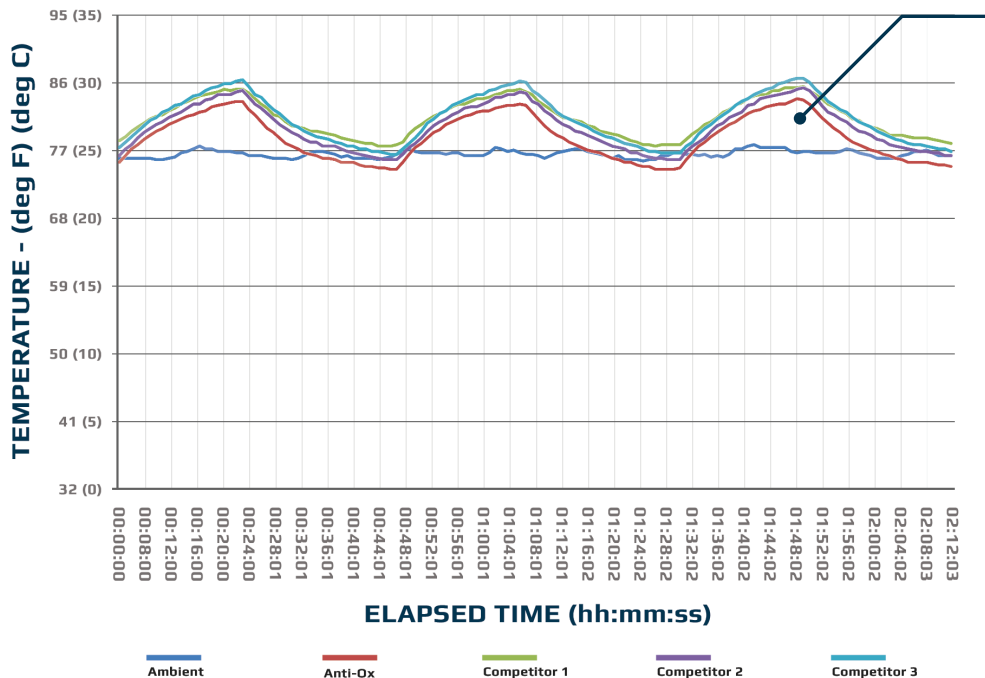

After over 700 cycles of testing, Anti-Ox produced a cooler connection than similar competing compounds.

Tests were performed to selected portions of, and in accordance with, UL 486A-486B.

Test circuits containing 0.10 ounces (3 grams) of different anti-oxidizing greases were assembled.

A current of 100 amps was applied to these circuits for a total of 20 minutes. The test current was then removed and left at 0 amps for a total of 25 minutes. These steps were then repeated for over 700 cycles.


PRIVATE LABEL SERVICES

You persevered through many years of hard work with unwavering dedication and continuous improvement to establish your reputation for consistently high-quality products, timely delivery, and competitive pricing. Your image, your professionalism, and your reputation for excellence are your most valuable assets. We know because we, too, are committed to providing the finest quality products, outstanding service, and dependability at the best price possible.

Our in-house graphics team can create detailed, customized, and professional product packaging designs that fit your specifications and visually enhance the image of your product offering.

More importantly, it's not only how you look on the outside but what's on the inside that counts. Our commitment to excellence and quality products results from constant improvement in our production process, a passionate and caring team, and continuous research and development.

Old fashioned values and responsive customer support lie at the heart of our promise to provide reliability and trust with your name on it. Quality, consistency, reliability, and trust - your reputation is our guarantee.

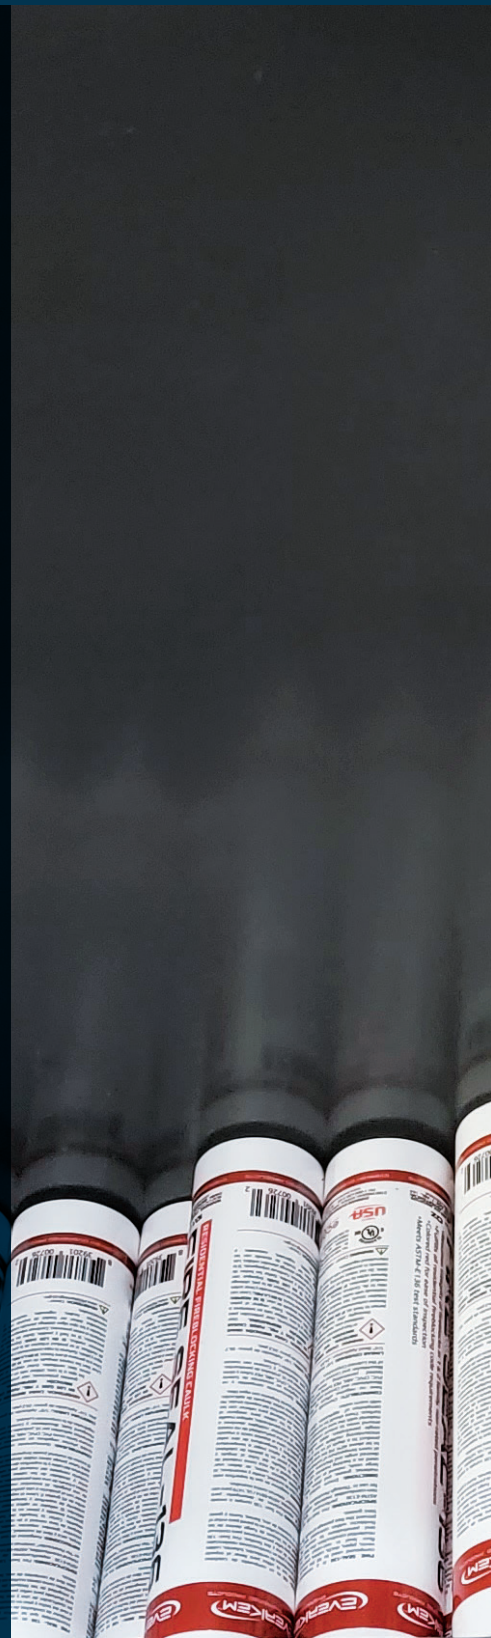



PRIVATE LABEL



**TOLL
MANUFACTURING**



BULK SALES


AVAILABLE CHEMISTRIES

- Acrylic latex
- Silicone sealants
- Butyl rubber
- MS polymer / hybrid technologies
- Firestopping materials
- Refractory mortars
- Electrical oxide inhibitors
- Electrical wire pulling lubricants

PACKAGING OPTIONS

- Squeeze tubes
- Caulk tubes
- Sausage tubes
- Bottles
- Cups, pails, and buckets
- Drums

CAULKING CARTRIDGES

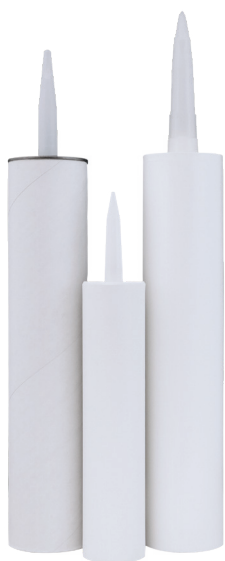

Caulking cartridges in standard 10 oz. and Quart sizes which fit most standard caulking guns. A range of thicknesses suited for varying product chemistries are available.

CARTRIDGE OPTIONS

- Available in a range of thicknesses to match product chemistries
- Plastic or fiber cartridges available
- Multiple styles of fixed and removable nozzles to match any application requirement.
- Additional options for foil sealing, cutting, and top rings. See table below for expanded options list.

ART & DESIGN OPTIONS

- Paper labels
- Pre-printed cartridges
- Design services available

Multiple nozzle types available



10 OZ. CARTRIDGES

VOLUME	9 oz. to 10.3 oz.
MATERIAL	Plastic (HDPE, LDPE) Fiber (Recycled paper)
THICKNESS	.047" to .083"
NOZZLES	Fixed nozzle Removable nozzle in multiple styles
PRINTING	Up to 6 color on C1S paper label; pre-printed cartridge, band or gap (Plastic cartridges) Up to 8 color on C1S paper; foil; shrink; (Fiber cartridges)
OTHER OPTIONS	Foil sealed Cartridge nub cut Top ring color identification or instructions (Fiber cartridges) Design services available

QUART CARTRIDGES

VOLUME	27 oz. to 30.4 oz.
MATERIAL	Plastic (HDPE, LDPE) Fiber (Recycled paper)
THICKNESS	.047" to .083"
NOZZLES	Fixed nozzle Removable nozzle in multiple styles
PRINTING	Up to 6 color on C1S paper label; pre-printed cartridge, band or gap (Plastic cartridges) Up to 8 color on C1S paper; foil; shrink; (Fiber cartridges)
OTHER OPTIONS	Foil sealed Cartridge nub cut Top ring color identification or instructions (Fiber cartridges) Design services available

** Not all product chemistries, feature, and specification combinations are possible on all packaging at all quantities. For more information on specific combinations and quantities, contact us.*

SAUSAGE TUBES

Sausage tube packaging provides an economical, low-waste alternative to pre-formed cartridges for sealants and adhesives.



ART & DESIGN OPTIONS

- Paper labels
- Pre-printed foil
- Design services available



LOWER COSTS

Sausage tubes provide significant cost savings over conventional, pre-formed cartridges. Reduced packaging and product waste, longer shelf life, and small storage footprint all contribute to sausage packaging's reduced costs.



REDUCED PACKAGE WASTE

Once the sealant is dispensed, the foil packaging compresses to an approximate height of $\frac{3}{4}$ in. (2 cm) tall. It would take ten empty sausage tubes to create the same packaging waste as one pre-formed 10 oz. caulk tube.

This means less cleanup and disposal costs as well as a greatly reduced impact on the environment.



SAVES SPACE

One pallet of 1,024 sausage tubes can take the place of over 2,000 10 oz. cartridges (about 1.5 pallets). This frees up valuable warehouse space, helping to reduce storage costs.



LONGER SHELF LIFE

Sausage packaging consists of a flat film that is formed into a sausage and clipped with the product inside. No air is introduced during the filling process. Combined with the air-tight clip, this results in extended shelf life.



LESS PRODUCT WASTE

Fixed nozzle cartridges retain a portion of product within their nozzles when emptied. This amount is thrown away with the tube. Throughout a job, this seemingly small amount of waste quickly adds up - roughly a case of 10. oz cartridges is wasted per pallet, while almost a case and a half of 28 oz. cartridges are wasted per pallet.

The removable and interchangeable nozzles of a sausage tube gun means that one nozzle can be used throughout the entire project, minimizing the amount of product waste.



Approximately 1% of product remains in the nozzle of an empty 10 oz. tube, and 2.75% remains in a 28 oz tube.

* Not all product chemistries, feature, and specification combinations are possible on all packaging at all quantities. For more information on specific combinations and quantities, contact us.

SQUEEZE TUBES



Squeeze tubes are an economical, convenient packaging alternative. Available in a variety of sizes to meet industry-specific needs.

SQUEEZE TUBE OPTIONS

- Plastic or plastic laminate
- Sizes available from 1 oz. to 8 oz.
- Custom sizes available, contact Everkem Diversified Products for custom sizing options.

ART & DESIGN OPTIONS

- Pre-printed tubes
- Design services available



BOTTLES



Plastic squeeze bottles ranging from 1 oz. to 32 oz with caps to maintain product shelf-life and prevent waste.

BOTTLE OPTIONS

- Sizes available from 1 oz. to 32 oz.
- Custom sizes available, contact Everkem Diversified Products for custom sizing options.

ART & DESIGN OPTIONS

- Paper labels
- Transparent labels
- Pre-printed bottles
- Design services available

** Not all product chemistries, feature, and specification combinations are possible on all packaging at all quantities. For more information on specific combinations and quantities, contact us.*

CUPS, PAILS, AND BUCKETS

Plastic cups, pails, and buckets available in a variety of sizes to meet the needs of any size application or project.

PACKAGING OPTIONS

- 8 oz. cup
- 16 oz. cup
- 32 oz. pail
- ½ gal pail
- 1 gal bucket
- 2 gal bucket
- 5 gal bucket

ART & DESIGN OPTIONS

- Paper labels
- Transparent labels
- Design services available



DRUMS

Drum quantities and packaging are available for all product chemistries.



** Not all product chemistries, feature, and specification combinations are possible on all packaging at all quantities. For more information on specific combinations and quantities, contact us.*

PRODUCT / PACKAGING

STANDARD

PRODUCT CHEMISTRIES

	10 OZ. CAULK TUBES	28 OZ. CAULK TUBES	20 OZ. SAUSAGE TUBES	1 OZ. SQUEEZE TUBES	2.8 OZ. SQUEEZE TUBES	4 OZ. SQUEEZE TUBES	5.5 OZ. SQUEEZE TUBES	8 OZ. SQUEEZE TUBES	8 OZ. CUPS
25 YEAR ACRYLIC LATEX CAULK	✓	✓	✓	✗	✗	✗	✓	✗	✗
40 YEAR SILICONIZED ACRYLIC CAULK	✓	✓	✓	✗	✗	✗	✓	✗	✗
ACRYLIC URETHANE SEALANT	✓	✓	✓	✗	✗	✗	✓	✗	✗
ACOUSTICAL SOUND SEALANT	✓	✓	✓	✗	✗	✗	✗	✗	✗
ALL-PURPOSE CONSTRUCTION ADHESIVE	✓	✓	✓	✗	✗	✗	✗	✗	✗
HEAVY DUTY DRYWALL ADHESIVE	✗	✓	✓	✗	✗	✗	✗	✗	✗
100% SILICONE SEALANT	✓	✗	✓	✗	✓	✗	✗	✗	✗
HIGH TEMPERATURE SILICONE SEALANT	✓	✗	✓	✗	✓	✗	✗	✗	✗
BUTYL RUBBER SEALANT	✓	✗	✗	✗	✗	✗	✗	✗	✗
HYBRID POLYMER SEALANT	✓	✗	✓	✗	✗	✗	✗	✗	✗
FURNACE & RETORT CEMENT	✓	✓	✗	✗	✓	✗	✗	✗	✓
ELASTOMERIC INTUMESCENT FIRESTOP CAULK	✓	✓	✓	✗	✗	✗	✗	✗	✗
NON-COMBUSTIBLE, NON-INTUMESCENT FIRESTOP CAULK	✓	✓	✓	✗	✗	✗	✗	✗	✗
SINGLE-FAMILY / RESIDENTIAL FIREBLOCK CAULK	✓	✓	✓	✗	✗	✗	✗	✗	✗
WIRE PULLING LUBRICANT	✗	✗	✗	✗	✗	✗	✗	✗	✗
ANTI-OXIDIZING COMPOUND	✗	✗	✗	✓	✗	✓	✗	✓	✗

PACKAGING OPTIONS

16 OZ. CUPS	32 OZ. CUPS	½ GAL. PAILS	1 GAL. BUCKETS	2 GAL. BUCKETS	3.5 GAL. BUCKETS	5 GAL. BUCKETS	1 OZ. BOTTLES	4 OZ. BOTTLES	8 OZ. BOTTLES	32 OZ. BOTTLES	55 GAL. DRUMS
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	X	X	X	✓	X	X	X	X	✓
X	X	X	✓	X	✓	✓	X	X	X	X	✓
✓	✓	✓	✓	✓	✓	✓	X	X	X	X	✓
X	X	X	✓	X	X	✓	X	X	X	X	✓
X	X	X	✓	X	X	✓	X	X	X	X	✓
X	X	X	✓	X	X	✓	X	X	X	X	✓
X	X	X	✓	X	X	✓	X	X	X	✓	✓
X	X	X	✓	X	X	✓	✓	✓	✓	X	✓

BULK & DISPLAY PACKAGING



Multiple unit packaging made from sturdy corrugated cardboard that also doubles as a self-merchandising display unit.

PACKAGE OPTIONS

- Brown and white standard colors, other color options available.
- Perforation options for ease of access or merchandising
- Custom sizing and other options available

ART & DESIGN OPTIONS

- Plain cartons
- Paper labels
- Pre-printed cartons
- Design services available

STANDARD BROWN



STANDARD WHITE





ART & DESIGN SERVICES

The success of your products lies not only in its formulation and performance but how you present it to the world. Our in-house graphic design team is ready to help create custom designs for all your private label packaging.

We work with you to create unique and impactful product packaging and artwork that reflects your product and the personality, message, and passion of your brand.

Even if you already have artwork available, we'll handle the process of transferring it to our many packaging options.

MERCHANDISING

In addition to our self-merchandising case packaging, Everkem Diversified Products offers several point of sale display options including a counter mat and countertop display unit.

Contact us for more options or for custom display/merchandising programs.



COUNTER / DESK MAT

High quality counter mats are excellent ways to draw attention to products and receive more attention at the point of sale compared to floor standing or wall-mounted displays. Our counter mats are made from a heavy-duty, scratch and stain-resistant plastic top supported by a thick, non-slip rubber backing.

FEATURES & SPECS

- Perfect for checkout counters as well as desks and workstations
- Scratch and stain-resistant plastic top
- Non-slip, durable rubber backing
- 19" width x 13" length x 1/8" height



COUNTERTOP DISPLAY UNIT

Our rugged, all-metal countertop displays are ideal for point of sale opportunities in the retail environment, and the perfect way to effectively merchandize our line of caulks and sealants.



FEATURES & SPECS

- Holds 36 standard 10 oz. caulk tubes
- No assembly required
- Attached pegboard hooks for easy installation onto existing pegboard shelving
- Information track on front of unit with Everkem branded insert
- 13" width x 10.5" height x 13" depth

**FREE WITH
6 CASE BUY-IN**

THE EVERKEM EXPERIENCE

Our values, our people, and our products are all part of a much larger commitment to you, something we like to call the **Everkem Experience**.

The Everkem Experience isn't tangible. It isn't a program or rebate. It's a state of mind, a way of building partnerships. It's a dedication to doing the small things that others don't, with the deep belief that these little things make the biggest impacts.



QUALITY PRODUCTS

The proof is in our products. Day in and day out, users the world over rely on and trust the performance and consistency of our solutions.



EXCEPTIONAL SERVICE

Service is our passion. We give every customer and every order the white glove treatment. If there's ever a problem, our policy is to fix it first and ask questions second.



MORE FLEXIBILITY

We're agile, versatile, and responsive to your needs. We create programs with **your** success in mind.



MAKING IT EASY

Ease of ordering, shipment tracking, and prompt follow-up ensure that working with us is easy and enjoyable.



“The surest path
to success is to help
others succeed.”


TAKE
THE
NEXT
STEP

Everkem is a product of the partnerships we build. The first step to establishing those partnerships is to connect with one another.

Whether you have questions about products and applications, pricing, or even if you'd just like to say hello - we'd love to hear from you!

 information@everkemproducts.com

 www.everkemproducts.com

 1-800-638-3160

GENERAL INFORMATION

| ORDERING INFORMATION

HOURS OF OPERATION:

Office hours are Monday through Friday, 9:00 am to 5:00 pm EST.

ORDERING:

Same day shipping on all 'in-stock' items with orders placed before 2:00 pm EST. Standard transit times do apply. Orders may be placed using the following methods:

- **Phone Orders at 1-800-638-3160**

Contact your Everkem Diversified Products Sales Representative or Customer Service Specialist Monday through Friday, 8:30 am to 5:00 pm EST. For after-business-hour orders, please leave a detailed voicemail message in your account manager's voicemail box or our general voicemail box. Your representative will confirm your order via call, fax, or email confirmation the following business day.

- **Fax Orders at (336) 661-7969**

All fax orders will be acknowledged verbally, via fax, or email confirmation. If you do not receive an order confirmation in one of these ways, we may not have received your order. Please contact us at 1-800-638-3160 to ensure we process your order promptly.

- **Email Orders**

Contact your Everkem Diversified Products Sales Representative or Customer Service Specialist. Detail the order, or attach a Purchase Order. If you do not receive an order confirmation in one of these ways, we may not have received your order. Please contact us at 1-800-638-3160 to ensure your we process your order promptly.

| PRICING & TERMS

PRICING:

All prices are subject to change without notice. We will make our best attempt to give thirty or more (30+) days in advance of any price increase(s). Contact your Everkem Diversified Products Sales Representative or Customer Service Specialist for current published pricing. All published prices are stated in minimum order quantities to obtain free shipping. Price breaks may be allowed for more significant quantities. Ordering a combination of different products can be used to achieve price breaks and prepaid freight minimums. If you have any pricing questions, please call us at 1-800-638-3160.

TERMS:

Standard terms are net 30 with approved credit. Please contact us to receive a confidential credit application or fax credit information to (336) 661-7969. Everkem Diversified Products will add a 2% monthly cumulative penalty to all invoices that are more than 30 days delinquent.

| SHIPPING

DELIVERY/FREIGHT:

All orders include free shipping with specified minimums within the contiguous United States. Shipping charges will apply to all orders requested for less than the specified minimum.

WARRANTY & DISCLAIMER

| WARRANTY

All Everkem Diversified Products manufactured products are warranted to be free from defects. Any such defective product will, at Everkem Diversified Products' discretion, be replaced free of charge. This replacement includes freight arrangements. Our liability under all warranties, expressed or implied, shall be limited to the purchase price or replacement of the defective product(s).

RETURN GOODS POLICY:

Everkem Diversified Products must issue a Return Goods Authorization (RGA) for all goods to be returned. For materials that hold a published shelf life, return authorization may be allowed, provided: the product is returned four (4) months before the end of the published shelf life date; be in full case quantities; be in good resaleable condition. A 20% restocking fee plus return freight charges will be deducted from the customer's credit. Everkem Diversified Products will inspect returned products upon arrival for the quantity returned, condition, and packaging before issuing credit. The returned goods policy does not extend to products that have been improperly used or altered by any entity other than Everkem Diversified Products.

FREIGHT CLAIMS:

Responsibility for acceptance of all shipments lies with the receiving party. Everkem recommends a thorough count and inspection of shipment before freight bill signing to ensure shipment accuracy and that the material received is in good condition. Customers must make claims on prepaid shipments with an Everkem Diversified Products Customer Service Representative within five (5) days of receipt of delivery. A copy of the original freight bill with the shortage or damage listed and the carrier's signature is required. The receiver accepts the delivery as complete, intact, and in good condition by signing the freight bill. Claims on collect shipments should be filed directly with the carrier by the receiver.

| PRODUCT SPECIFICATIONS

Everkem Diversified Products makes no representations or warranties regarding the dimensions, weights, and packaging appearance listed in the Everkem Diversified Products Catalog. Dimensions, sizes, and weights listed for products in this catalog are nominal and are provided as a convenience, for reference only, at printing. They are subject to change without notice.



WINSTON-SALEM, NORTH CAROLINA 27103

1-800-638-3160

WWW.EVERKEMPRODUCTS.COM

